





JANOME 1110DX

3-4 Thread or 2-Thread Serging

So Advanced, So Quick, So Easy To Thread

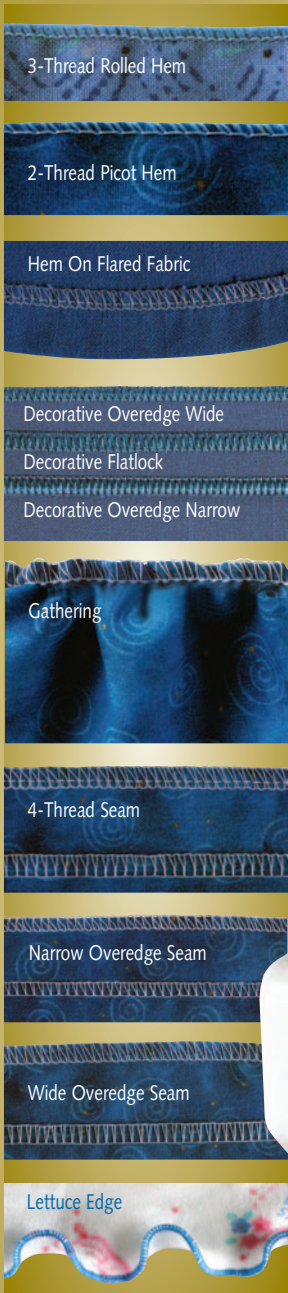


Easy-To-Follow Upper Thread Guides

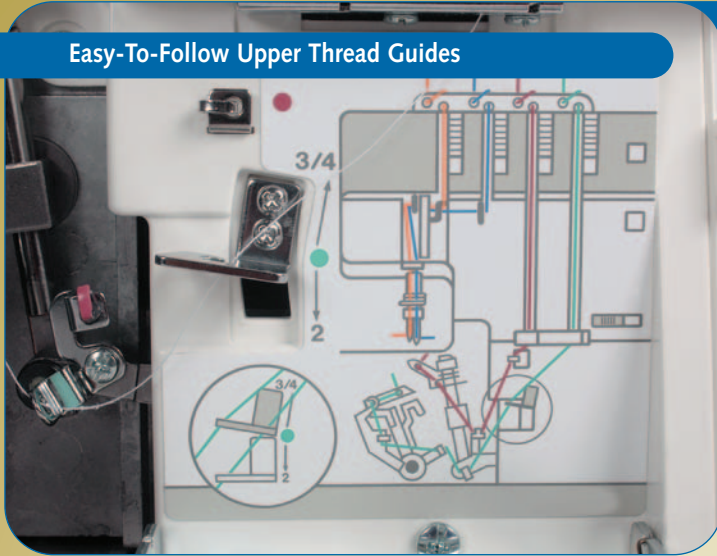


The Threading Chart and Color-Coded Guides are easy to follow for 2-thread or 3-4 thread serging.

Dual Feed Dogs And Differential Feed Ensure Optimum Precision

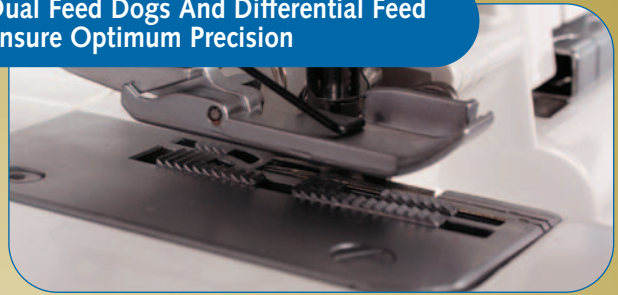


The 1110DX has a Differential Feed device with two feed dogs, virtually eliminating puckered edges on woven fabrics and stretched edges on knits.


One feed dog moves the exact amount of fabric needed for the stitch length while the other pushes or pulls the fabric according to the ratio on the eed dial. This ratio can be set anywhere from 0.5 to 2.25.



Adjustable Cutting Width.

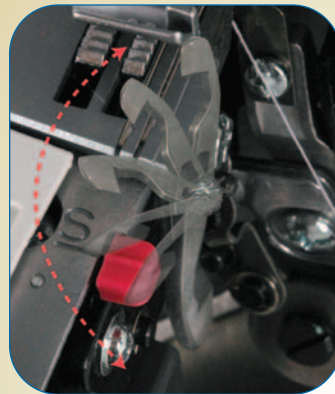

Easily Retractable Upper Knife.




Differential Feed 0.5-1.0



Differential Feed 1.0-2.25

Easy To Reach Lower Loper Guides



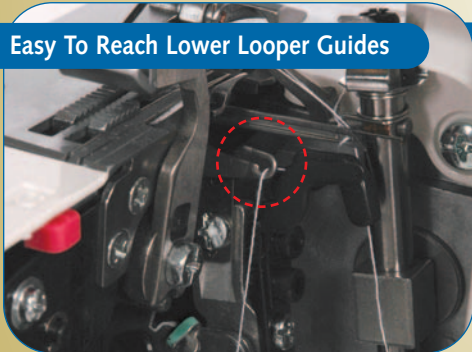


Threading the Lower Loper is a breeze when you have easy access. Just rotate the thread guide and the lower looper thread guides pop into view.



Solid metal base plate keeps machine stable, quiet and smooth running.


Quick Change Rolled Hem

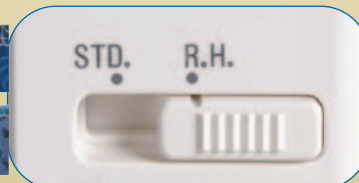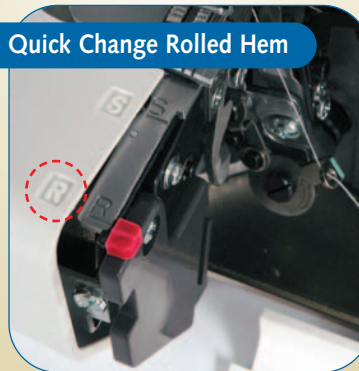

No need to change the needle plate for rolled hemming. Just slide the needle plate to "R" position and choose "R.H." on the lower looper pre-tension setting slider.

SPECIFICATIONS

- SEAM TYPE: 2 and 3/4 THREAD OVERLOCK
- NEEDLE: REGULAR TYPE (15x15P)
- SEAM LENGTH: 1-5mm
- SEAM WIDTH: 3.5mm (regular); 5.7mm (wide); 2.00mm (narrow)
- DIFFERENTIAL FEED RATIO: 0.5-2.25
- NEEDLE GUARD: FRONT & BACK
- CUTTING WIDTH: ADJUSTABLE
- UPPER KNIFE: RETRACTABLE
- TENSION DIALS: NUMBERED (ONE ROTATION)
- THREAD GUIDES: COLOR-CODED
- PRESSER FOOT: SNAP-ON TYPE
- SPEED CONTROL: ELECTRONIC

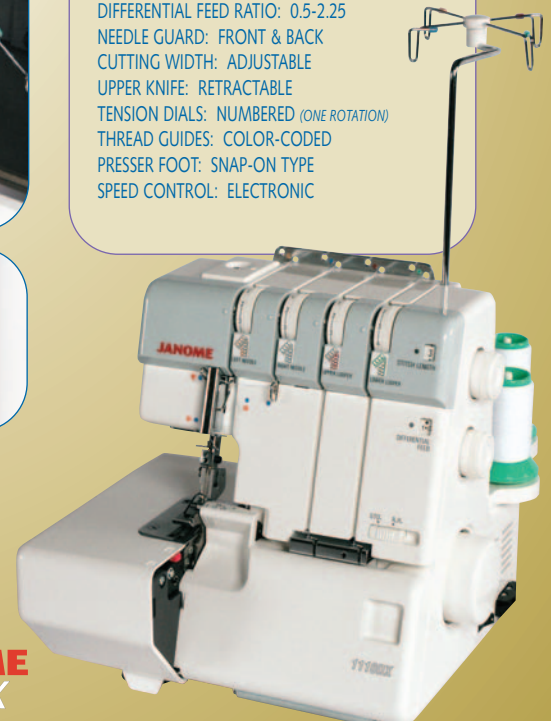

JANOME
1110DX