

PIPING CORD EMBELLISHED TABLE RUNNER

Accessory of the Month November 2017


Piping Foot



PIPING CORD EMBELLISHED TABLE RUNNER

Accessory of the Month November 2017

Piping Foot

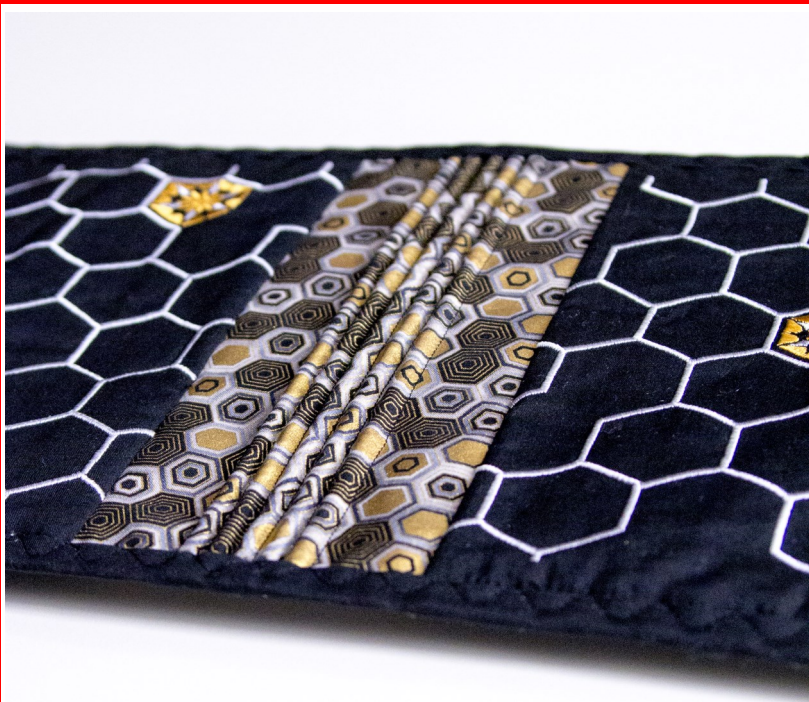

Requirements

- 5' x WOF (width of fabric) for the piping section.
- 3 x 13 1/2" x 11 1/2" fabric for the front panels of the runner.
- 3 x 12 1/2" x 10 1/2" fabric for the back panels of the runner.
- 4 x 2.5" x WOF (width of fabric) for binding
- 3m piping cord size 2
- Sewing thread to match piping section
- Embroidery thread
- Empty bobbins
- Flower head Pins
- Quilting clips
- Fabric Marker
- Ruler
- Rotary cutter
- Mat
- Piping Foot
- 1/4" Foot (O)
- Walking Foot
- Iron on wadding
- Tear away if doing embroidery in large blocks.

Construction:

1. Start with a 5' x WOF strip of fabric.
2. Cut in half so you have 2 pieces 5' x 22".
3. Mark the center of one of the strips. This will be the top and the first guide line to attach the piping.
4. Lay one strip of the piping cord between the two layers of the strips under the marked line.
5. Select the straight stitch on the machine.
6. Attach the piping foot. | Fig. A
7. Sew down the length of the piping cord to attach using the tunnel of the foot to guide the cord through. | Fig. B
8. Continue adding row after row of piping cord by using the same method as above and working left and right of the center.
9. Cut the completed strip back to 4 1/2" x 10 1/2".
10. Set the piping panels aside.



PIPING CORD EMBELLISHED TABLE RUNNER

Accessory of the Month November 2017

Piping Foot

6. Press iron on wadding to the back of the three front panels.
7. Embellish the three panels of the table runner to your desired effect. We used an embroidery design from the Janome HMC15000. (Design: HomeDecor_3_04)
8. Cut the front blocks back to 12 ½" x 10 ½".
9. You should now have 5 sections to create the table runner.
10. Assemble so that you have 3 embellished sections separated by the piping sections.
11. Take the center panel and lay the left side piping down right sides together matching the raw edges. | Fig. C
12. Lay the backing on top also matching the raw edges. | Fig. D
13. Attach the 1/4" foot to the machine.
14. Sew a 1/4" seam along short side. | Fig. E
15. Lay the right side piping down on top of the center panel matching the raw edges. Lay the backing on top also matching the raw edges. | Fig. F
16. Sew 1/4" seam along short side.
17. Open out as the piping will now be on the inside. Press the middle section so it is sitting flat.
17. Repeat the process of layering the piping, front and back for the outer edges on the left and right sides. | Fig. G
18. Sew 1/4" seam to attach. | Fig. H
19. Press the sections of the runner.
20. Attach the walking foot.
21. Quilt the larger sections of the runner with desired quilting method.
22. Sew around the edge to baste before attaching the binding with a straight stitch length 3.0mm.
23. Attach binding to the edge of the runner.
24. You have now completed the runner.

